



SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS

SQUARE NICKEL BRONZE TOP
8 1/2" (215) TOP - MEDIUM RECEPTORS
 Conforms to ASME A112.6.7/CSA B79.7

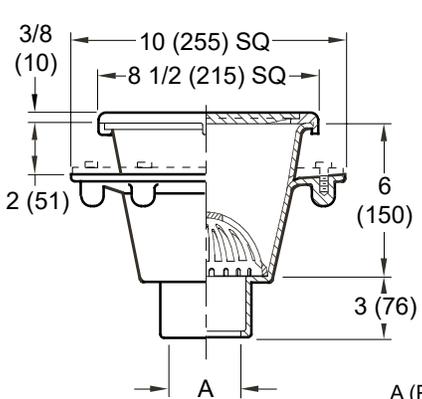

Free Area
19.43 SQ IN
(125) SQ CM

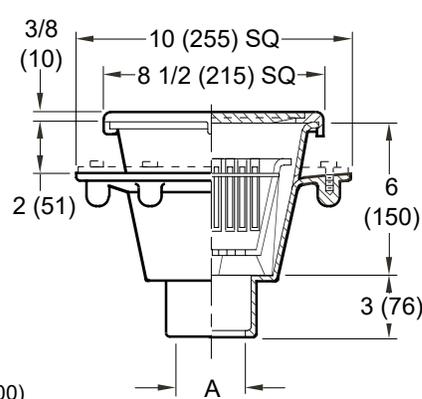

- A (Pipe Size) = 02(50), 03(75) or 04(100)
- | | | | |
|--------------------------|--------------------------------------|--------------------------|------------|
| <input type="checkbox"/> | Fig. 3100C CAULK OUTLET | <input type="checkbox"/> | Fig. 3101C |
| <input type="checkbox"/> | Fig. 3100Y NO-HUB OUTLET | <input type="checkbox"/> | Fig. 3101Y |

FEATURES, OPTIONS & ORDERING INFORMATION

REGULARLY FURNISHED: Cast Iron Flanged Receptor with Seepage Holes, Acid Resistant Coated Interior, Nickel Bronze Rim and Secured ADA Grate. Aluminum Dome Bottom Strainer or White ABS Sediment Bucket as Indicated by Figure Number.

- OPTIONAL MATERIALS:**
- | | |
|--------------------------|---------------------------------|
| <input type="checkbox"/> | All Duco Cast Iron Receptor -CI |
| <input type="checkbox"/> | All Galvanized Receptor -G |

- VARIATIONS:**
- | | |
|--------------------------|--|
| <input type="checkbox"/> | Aluminum Flat Bottom Strainer -FBS |
| <input type="checkbox"/> | Flashing Clamp -C |
| <input type="checkbox"/> | Polished Aluminum Dome Bottom Strainer -PDBS |
| <input type="checkbox"/> | Vandal Proof Screws -U |
| <input type="checkbox"/> | L Speedi-Set® Service Weight |
| <input type="checkbox"/> | LXH Speedi-Set® Extra Heavy |
| <input type="checkbox"/> | S.S. Mesh Lined Bucket -BS |
| <input type="checkbox"/> | Drain Installation Device -DID |

SUFFIX NUMBER	SQUARE RIM	DESCRIPTION
<input type="checkbox"/>	-10	Less NB Rim and Grate
<input type="checkbox"/>	-11	Less Grate w/NB Rim
<input type="checkbox"/>	-12	With NB Rim and 1/2 Grate
<input type="checkbox"/>	-13	With NB Rim and 3/4 Grate
<input type="checkbox"/>	-14	With NB Rim and Grate with 2 1/2" (64) SQ Center Hole
<input type="checkbox"/>	-15	With NB Rim and Aluminum Recessed Grate (Fig. 3100 Only)
<input type="checkbox"/>	-19	With NB Rim and Hinged ADA Grate
<input type="checkbox"/>	-21	With NB Rim and Grate with 4" (100) DIA NB Funnel
<input type="checkbox"/>	-22	With NB Rim and Grate with 6" (150) DIA NB Funnel
<input type="checkbox"/>	-25	With NB Rim and Grate with 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval NB Funnel
<input type="checkbox"/>	-26	With NB Rim and Grate with 6(150) x 2 1/2(64) x 1"(25) High Oval NB Funnel
<input type="checkbox"/>	-41	With NB Rim and Solid Cover
<input type="checkbox"/>	-42	With NB Rim and 1/2 Solid Cover
<input type="checkbox"/>	-43	With NB Rim and 3/4 Solid Cover
<input type="checkbox"/>	-44	With NB Rim and Solid Cover with 2 1/2" (64) DIA Center Hole

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S3100**
 SIZE **A**
 SCALE: **NONE**
 DATE: **9-19-85**
 APPROVED BY: **SJM**
 CHECKED BY: **JD**
 DRAWN BY: **PJ**
3100, 3101
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

R P Q N	4-19-24 2-21-24 7-28-23 3-13-23	Added ASME Note Revised Variations Removed Function Added ® to Speedi-Set	HS HS HS KK	BW CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3100, 3101
REV.	DATE	DESCRIPTION	BY	CKD. BY			