

H

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



MEMBER OF:

LOCATION

SCUPPER DRAINS STAINLESS STEEL - CARBON STEEL

SCUPPER DRAIN WITH ANGLE GRATE

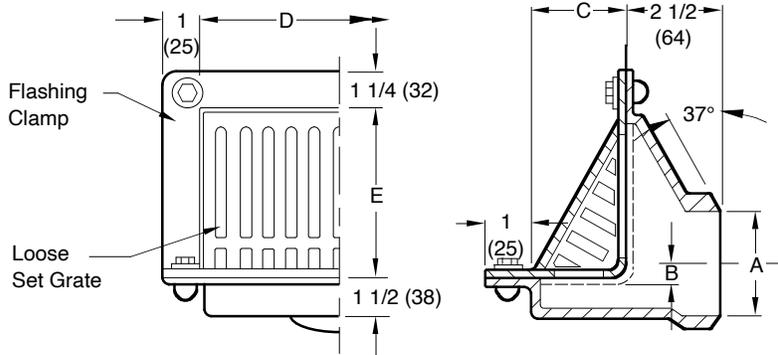


Fig. 9785BW. . . BUTT WELD OUTLET

PIPE SIZE	A	B	C	D	E	Free Area
02 (50)	1/4 (6)	1/4 (6)	3 1/4 (83)	8 3/4 (220)	5 (125)	17.87 (115 SQ. CM)
03 (75)	04 (100)					
05 (125)	1 3/4 (44)	1 3/4 (44)	4 (100)	10 1/2 (265)	6 1/2 (165)	35 (226 SQ. CM)
06 (150)	06 (150)					

Schedule 40 Regularly Furnished

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body with Nickel Bronze Loose Set Grate and Clamping Collar.

VARIATIONS:

- Vandal Proof Grate -U
- BW Butt Weld Outlet (Specify Schedule -S05, -S10 or -S40)

OPTIONAL MATERIALS:

- A-27 Carbon Steel Body -A27B
- All A-27 Carbon Steel -A27
- All CF8M (Equivalent to Type 316) Stainless Steel -316
- All CF8 Stainless Steel -304
- CF8M (Equivalent to Type 316) Stainless Steel Body -316B

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S9785

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD

CHECKED BY:
VGD

DRAWN BY:
PJ

9785

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							9785