

OBF Series

MODEL M-OBF4 OUTDOOR LARGE CAPACITY BOTTLE FILLER DESIGN

STANDARD FEATURES

- Adult ADA compliant
- Pushbutton and Hands Free Sensor Operated Bottle Filler
- Auto-Purge Sensor Function to Assure Fresh Water Supply
- Battery Pack 6AA
- Oversize Bottle Filler Opening with 1.5 GPM (5.7 LPM) Laminar Flow Spout
- Resistant To Sunlight, Heat, Moisture And Wear
- 14 Gauge, Heavy Duty Stainless Steel Construction with Corrosion and Scratch Resistant Finish
- 100-Mesh Inlet Strainer
- Access Cover, Heavy Duty Stainless Steel,
- Vandal Resistant

SUGGESTED SPECIFICATIONS

Model M-OBF4 Bottle filler shall be activated by a 9 volt sensor or the pushbutton as standard. Unit shall contain a 100-Mesh Inlet Strainer, 6-AA battery pack and 1.5 GPM (5.7 LPM) Laminar Flow Spout. Auto-Purge Sensor function shall activate Bottle Filler for 10 second duration 24 hour after last activation as standard and allow for purge cycle adjustment. Construction shall be 14 gauge, all stainless steel and pedestal base of bottle filler shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. A self-closing push-button, needing less than 5 pounds force, shall activate an internally mounted valve. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61.

Product Warranty

3000 Gallon PFAS Filter Certifications

Options Notes:

¹ See separate option sheet.

² This option is not available freeze-resistant.



Model M-OBF5-PF Shown

MODEL:

(Must Specify)

PUSHBUTTON AND SENSOR OPERATION

- | | |
|---------------------------------|------------------------|
| ☐ M-OBF4 | Satin Stainless Finish |
| ☐ M-OBF5 | Green Powder-Coated |
| ☐ M-OBF6 | Red Powder-Coated |
| ☐ M-OBF7 | Blue Powder-Coated |

PUSHBUTTON OPERATION ONLY

- | | |
|----------------------------------|------------------------|
| ☐ M-OBFM4 | Satin Stainless Finish |
| ☐ M-OBFM5 | Green Powder-Coated |
| ☐ M-OBFM6 | Red Powder-Coated |
| ☐ M-OBFM7 | Blue Powder-Coated |

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- | | |
|--------------------------------|---|
| ☐ -FRU1 | Underground Freeze-Resistant Single Valve (Pushbutton Operation Only, Filter ¹ N/A) |
| ☐ -FRU2 | Underground Freeze-Resistant Double Valves (Pushbutton Operation Only, Filter ¹ N/A) |
| ☐ -HB1 | Hose Bibb with Vacuum Breaker ^{1,2} |
| ☐ -HB3 | Vandal Resistant Hose Bibb with Vacuum Breaker ^{1,2} |
| ☐ -LOGO | Customer Specified Logo |
| ☐ -PF | Pet Fountain with Pushbutton Valve |
| ☐ -SLPT | 10° Bottle Filler Sloped Top |

ACCESSORIES

(additional costs may be incurred)

- | | |
|----------------------------------|--|
| ☐ -AP | Auto-Purge Sensor Function Controller |
| ☐ -IAP | In-Ground Anchor Plate ¹ |
| ☐ -WF3000 | 3000-Gallon PFAS Water Filter ¹ NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics (N/A with -FRU ¹) |

Complies with the following standards:





Federal Public Law 111-380 (No Lead)






WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

OBF Series MODEL M-OBF4 OUTDOOR LARGE CAPACITY BOTTLE FILLER DESIGN

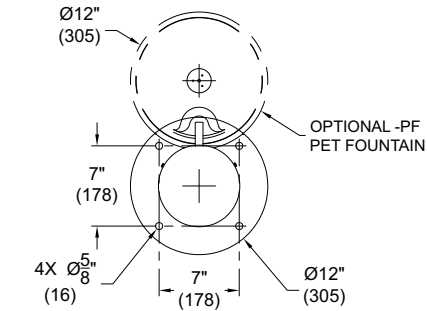

OPTIONAL -PF PET FOUNTAIN
DETAIL

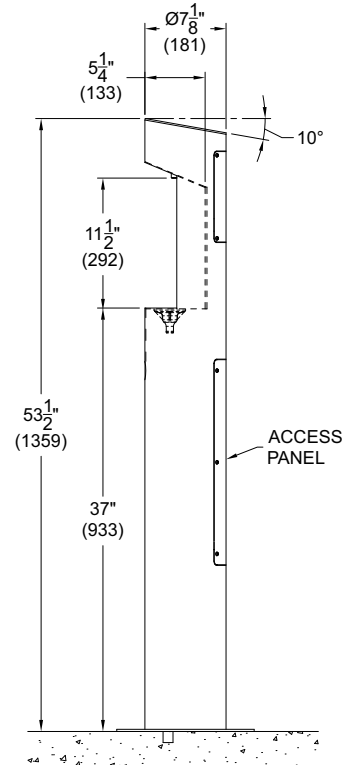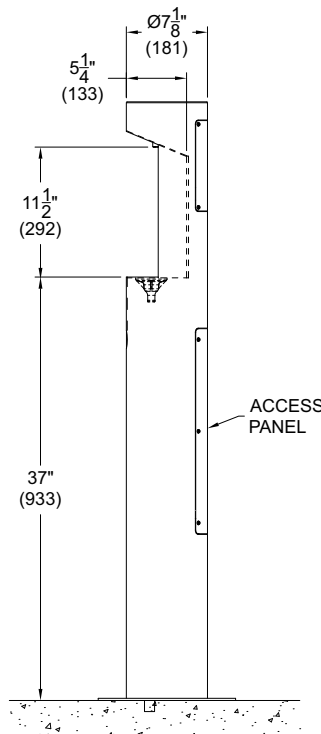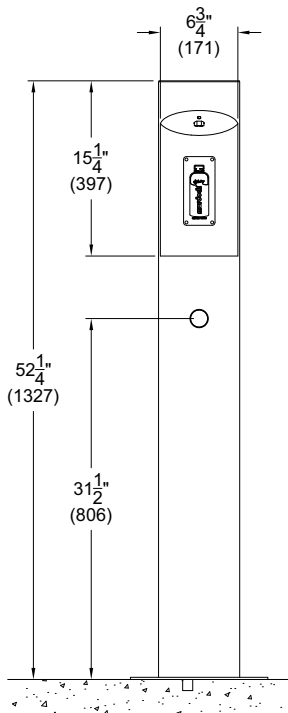

M-OBF4-SLPT

GENERAL DIMENSIONS:

1. ALL DIMENSIONS ARE IN INCHES (MM)
2. STOP VALVE NOT PROVIDED
3. MODELS MANUFACTURED FROM JANUARY 2025 TO PRESENT INCLUDE LARGER BOTTLE FILL AREA.

**SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.