


PROMENADE DECK DRAINS

MEDIUM - 11" (280) SQUARE WITH EXTENSION

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

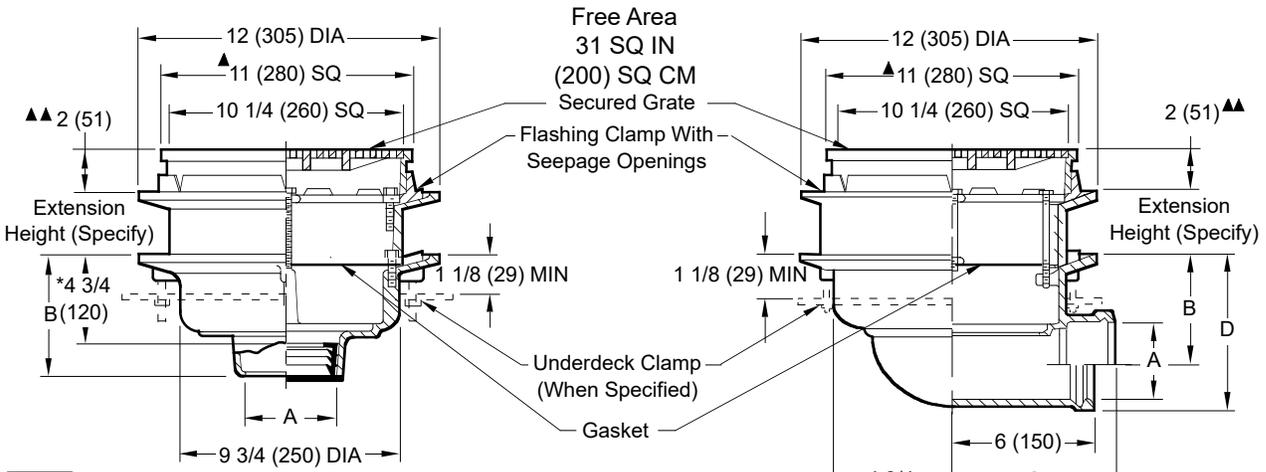

- Fig. 1450C (-E) CAULK OUTLET
- Fig. 1450T (-E) THREADED OUTLET
- Fig. 1450Y (-E) NO-HUB OUTLET
- Fig. 1460C (-E) CAULK OUTLET
- Fig. 1460T (-E) THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 (150) for Caulk, NO-HUB and Speedi-Set®				
	4 3/4 (120) for Threaded				

A SIZE	02(50)	03(75)	04(100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)
C	10 (254)	9 3/4 (248)	9 5/8 (244)
D	6 1/2 (165)	6 5/8 (168)	6 5/8 (168)

NOTE: Dimensions shown in parentheses are in millimeters.

recommended deck opening	
with suffix -R	13 (330) DIA
less suffix -R	11 (279) DIA

- This Dimension to Internal stop of Speedi-Set® Gasket
- ▲ Add 1/4" (6) when bronze top is specified.
- ▲▲ Add 3/16" (5) when bronze top is specified.

NOTE: Specify Secondary Flashing Clamp When Drain is to be Flashed at Flange Below Insulation

REGULARLY FURNISHED:
 Duco Cast Iron Body, Extension and Flashing Clamp with Seepage Openings and Secured Cast Iron Square Hole ADA Light Duty Grate.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
 - NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 1460 only)
 - Underdeck Clamp -C
 - Secondary Flashing Clamp -C2
 - Sump Receiver -R
 - Vandal Proof Grate -U
 - Roof Deck Plate -RDP
 - Heel Proof Grate -HP
 - Bucket -B (Fig. 1450 Only)

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

DRAWING NUMBER S1450 (-E)
 SIZE A
 SCALE: NONE
 DATE: 3-27-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: VGD
 FIGURE NUMBER 1450 (-E) 1460 (-E)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							1450 (-E), 1460 (-E)