

springH2O[®]
BOTTLE FILLERS BY MURDOCK[®]

BF12S Bottle Filler

SENSOR OPERATED VANDAL RESISTANT
STAINLESS STEEL BOTTLE FILLER

STANDARD FEATURES

- All Heavy Gauge Stainless Steel Construction
- Vandal Resistant Seamless Stainless Steel Alcove
- Auto-Purge Function to Assure Fresh Water Supply
- ADA Compliant
- 120VAC/9V DC Plug-In Transformer
- Hands-Free Sensor Operation
- Laminar Flow Nozzle 1.2 GPM (4.54 l/min) at 70 PSI
- 20 Second Maximum Run Time
- Optional -BCD Bottle Counter / Filter Status Display
- Fits existing Current Murdock[®] A171, A172 Series Units
- May be used with certain competitor models
(Contact Factory for more information)

SUGGESTED SPECIFICATIONS

Sensor Operated Vandal Resistant, Stainless Steel, Bottle Filler shall be Murdock[®] model BF12S. Unit shall include Sensor Operated activation with a 20 second maximum run time. Auto-Purge Sensor function shall activate Bottle Filler for 10 second duration 24 hours after last activation as standard and allow for purge cycle adjustment.

Housing construction to be heavy gauge, type 304 stainless steel with exposed surfaces polished to a #4 satin finish. Bottle Filler shall provide 1.2 GPM (4.54 l/min) flow rate with a Laminar Flow Spout to minimize splashing. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61.

Optional -BCD (Bottle Counter / Filter Status Display) shall indicate the quantity of 16 oz disposable Plastic Bottles saved from a land fill. -BCD option displays the Water Filter Status and includes LED Light to illuminate and brighten the Bottle Fill area when a Bottle is detected. (BCD not offered with -BAT.)

“RATED FOR INDOOR OR OUTDOOR USE”

Refer to Installation instructions for complete details.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61: Q ≤ 1

NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.

[3000 Gallon PFAS Filter Certifications](#) [Product Warranty](#)

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL



Model BF12S-BCD Shown

PATENT# US D1062348 S



Shown with Murdock[®] Drinking Fountain for reference only.

MODEL: (Must Specify)

- BF12S Sensor Operated Stainless Steel Bottle Filler
- BF12S-BCD Sensor Operated Stainless Steel Bottle Filler with Bottle Counter / Filter Status Display
- BF12S-BAT Battery Sensor Operated Stn Stl Bottle Filler (N/A with -BCD Bottle Counter Display)

OPTIONS: (Additional costs may apply)


- EG22 Enviro-Glaze[®] Matte Black Powder Coat

ACCESSORIES: (Additional costs may apply.)

- AP Auto-Purge Function Controller¹ (Adjusts Purge Cycle Setting)
- WF3000 3000-Gallon PFAS Water Filter¹ (NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics)

NOTES:

1- Refer to Supplemental Submittal Sheet for product details.

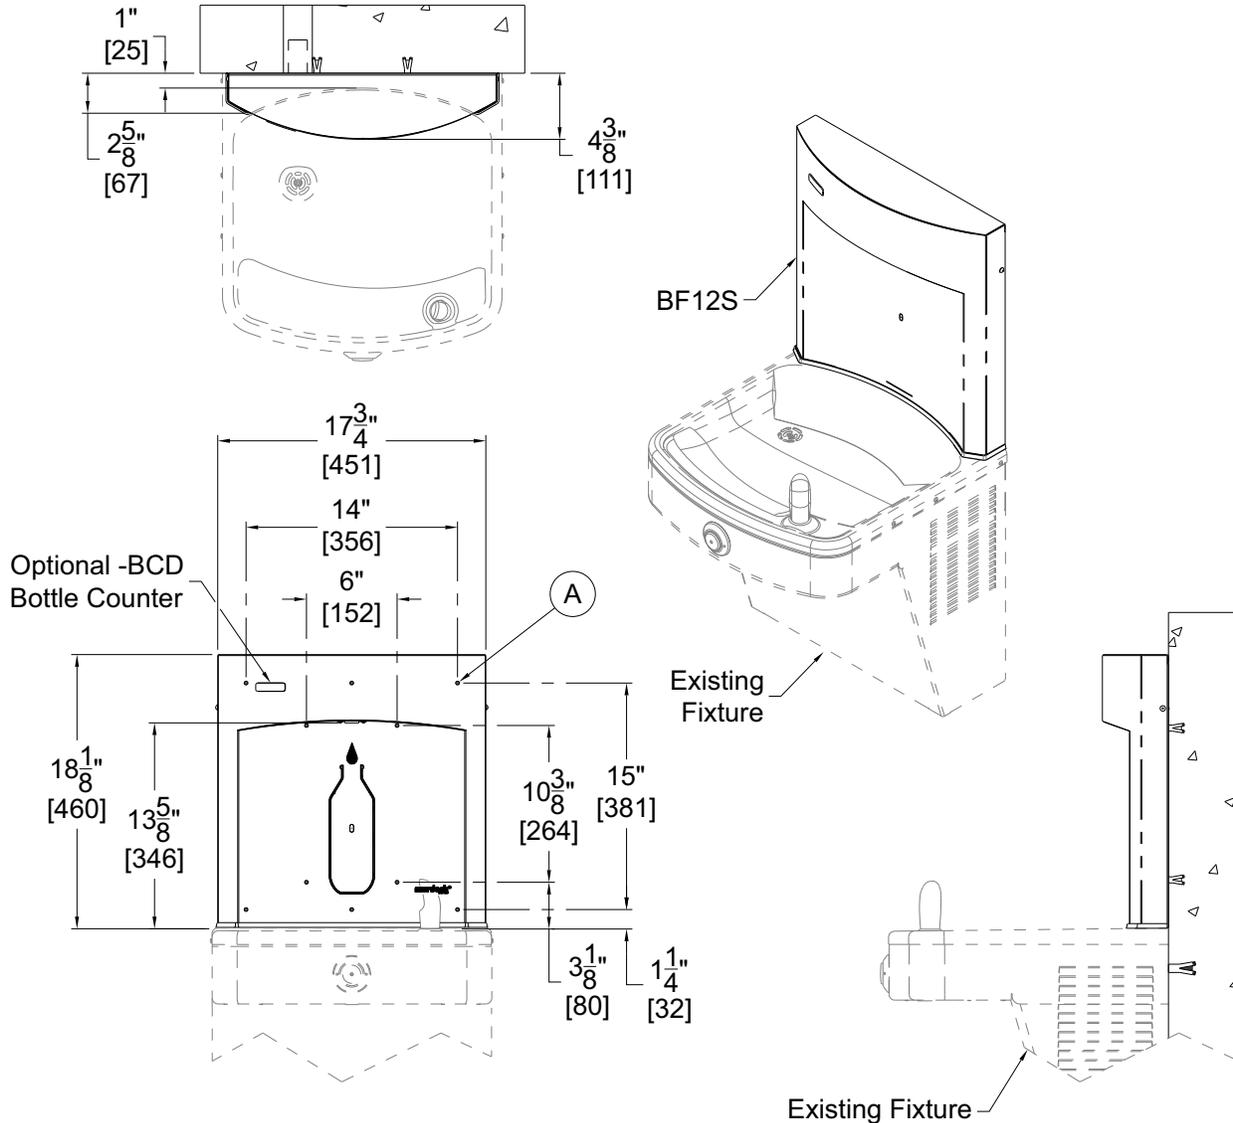

General Note:

1. All dimensions are in inches [MM]

- A. Ø1/4" Holes, 10 Places for Anchoring Hardware, provided by others

IMPORTANT: Dimensions are shown for reference only. Refer to product Installation Manual for complete details prior to Rough-in.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.