


FLOOR DRAINS

MEDIUM DUTY DRAINS WITH 8 1/2" ROUND ADJUSTABLE TOPS

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

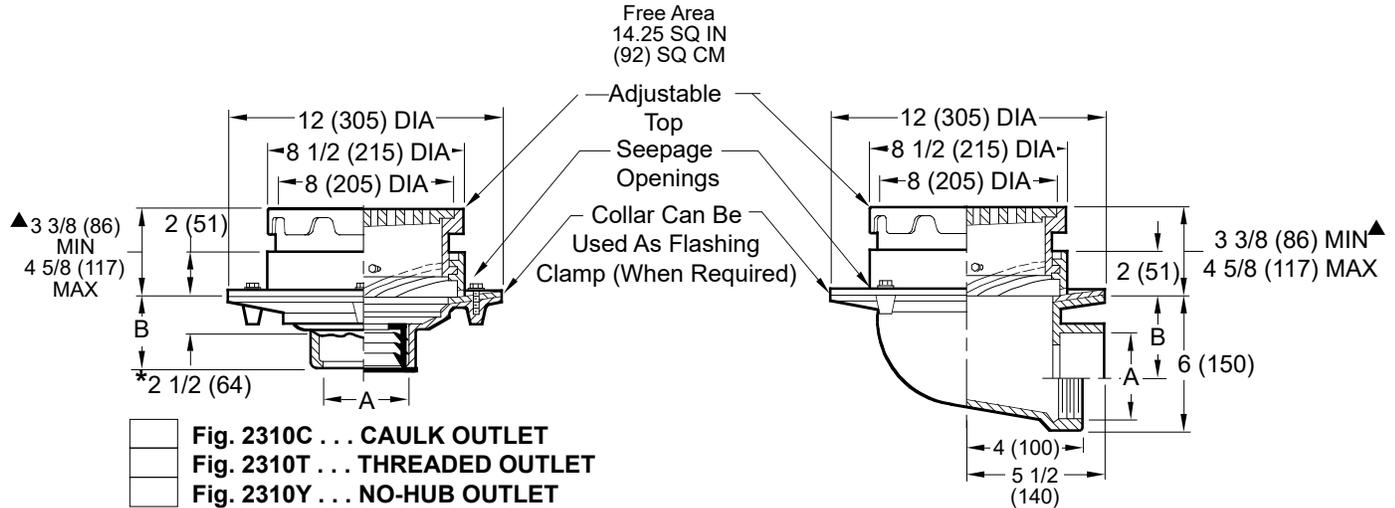

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set®, 2 (51) for Threaded			3 3/4 (95) NO-HUB Only	

Fig. 2315C ... CAULK OUTLET
 Fig. 2315T ... THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

*This Dimension to Internal Stop of Speedi-Set® Gasket.
 ▲ add 3/16" (5) when bronze top is specified

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing
 Collar with Adjustable Top and Slotted
 ADA Grate.

VARIATIONS:

- Closure Plug -XP (Fig. 2310 only)
- Dome Grate -D
- Extensions (Specify Height) -E
- Flat Bottom Strainer -FBS (Fig. 2310 only)
- Hinged Grate -H
- L Speedi-Set® Service Weight (Fig. 2310 only) 2(50), 3(75) & 4"(100) sizes only
- LXH Speedi-Set® Extra Heavy (Fig. 2310 only) 2(50), 3(75) & 4"(100) sizes only
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2315 only)
- Square Top -S
- ** Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2310 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9725)

**Not available on Fig. 2310T threaded outlet drain

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2310
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER 2310, 2315
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	7-15-24	Revised Variations & Fig. Opts	HS	KV			2310, 2315
	3-10-23	Added ® to "Speedi-Set"	KK	CL			
	1-23-23	Added ADA	KK	JT			
	7-22-19	Added Load Rating	MW	JM			