



Division of
 Acorn Engineering Company®



A MEMBER OF



Ligature Resistant No-Caulk Shower Drain

Ligature Resistant Stainless Steel Strainer Grate and No-Caulk Brass Drain Body are designed for use with pre-formed Fiberglass Shower Stall Bases and Whitehall® Solid Surface Shower Floors (only). The Strainer Grate is fabricated of 16 gauge type 304 Stainless Steel and is polished to a #4 satin finish. The Drain Body is sealed to the Shower Base with a Fiber and Rubber Washer.


Intended installation is to a 2" Schedule 40 DWV Pipe (provided by others) which is secured with a mechanically compressed Rubber No-Caulk Gasket.

The Strainer Grate is designed with Self-Clinching Vandal Resistant Screws and Eccentric Threaded Washers that fit into the Drain Body Snap Groove and secures the Strainer Grate to the Drain Body by compression. The Strainer Grate Extension helps reduce the risk of using the Strainer Grate as a Ligature point.



Patent #11,261,594 B2

WHPD-2NH

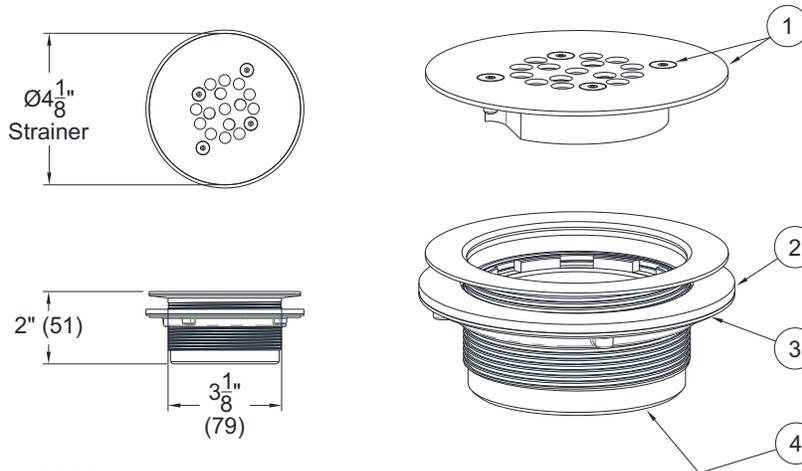

NOTES:

1. Stainless Steel Ligature Resistant Strainer, Vandal Resistant Fasteners
2. Rubber and Fiber Seal Washers
3. Securing Nut
4. No-Caulk Rubber Gasket for 2" IPS (Internal - Not Pictured)

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____



All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.