


# ADJUSTABLE FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS

## EXTRA HEAVY DUTY-750 LBS. (340kg)

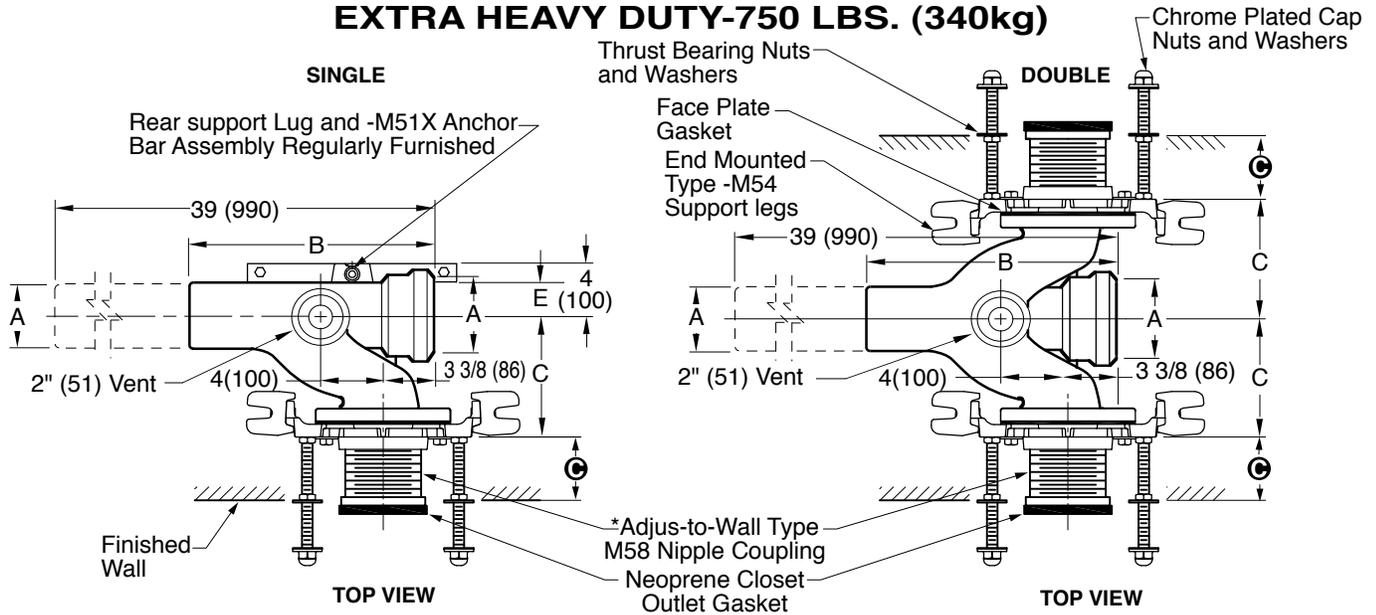


A SIZE	B	C	D		E
			MIN	MAX	
4 (100)	16 (405)	7 (180)	5/8 (16)	3 3/8 (86)	3 (76)
5 (125)	15 1/2 (395)	9 (230)	5/8 (16)	3 3/8 (86)	3 1/2 (89)

**NOTES:**

1. Base support must be securely anchored to floor with 1/2" (13) anchors able to withstand a pull-out force of 500 lbs (227 kg). The rear anchor bar must be securely anchored to floor with 1/2" (13) anchors able to withstand a pull-out force of 1000 lbs (454 kg). Pull-out forces are calculated values, no safety factor has been applied.
2. \*Dimension to top of vent.

**NOTE:** Dimensions shown in parentheses are in millimeters.

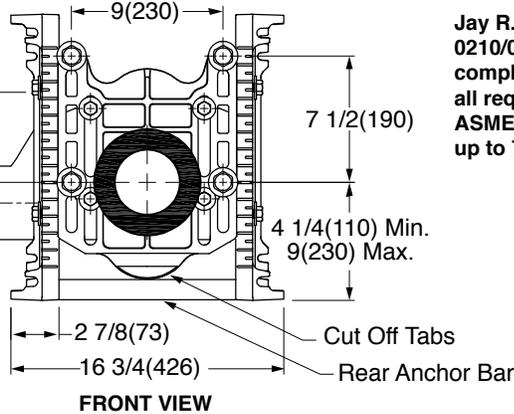


Jay R. Smith  
0210/0220-M58-M54-XX  
complies with and/or exceeds  
all requirements of  
ASME A112.6.1M  
up to 750 lbs.

*LENGTH	MIN	MAX
10(255)	8 3/4"(222)	9 3/4"(247)

\*NOTE: When nipple lengths between 3 1/4" (83) and 9 3/4" (247) are specified, the 10" (255) nipple will be supplied. The threaded end of nipple must be cut to specified length by others.

- Fig. 0210L -M58-M54-XX ..... CAULK Left Hand
- Fig. 0210R -M58-M54-XX ..... CAULK Right Hand
- Fig. 0210D -M58-M54-XX ..... CAULK Double
- Fig. 0220L -M58-M54-XX ..... CAULK Left Hand Long Barrel
- Fig. 0220R -M58-M54-XX ..... CAULK Right Hand Long Barrel
- Fig. 0220D -M58-M54-XX ..... CAULK Double Long Barrel

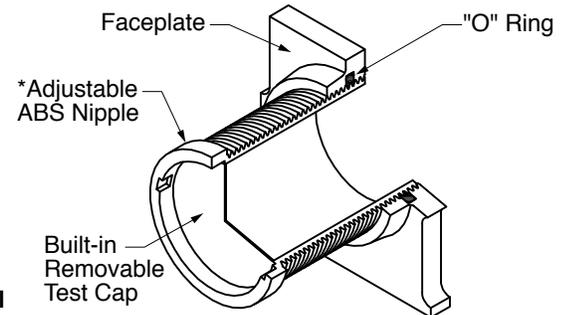

\*ABS (Regularly Furnished)

DRAWING NUMBER: s0210, 0220 -M58-M54-XX  
 SIZE: A  
 SCALE: NONE  
 DATE: 1-27-22  
 APPROVED BY: CL  
 CHECKED BY: CL  
 DRAWN BY: KK  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
A	2-16-22	Rev. Drawing		KK	CL			0210 -M58-M54-XX 0220 -M58-M54-XX