

SPECIAL PURPOSE DRAIN

LARGE CAPACITY - SIDE OUTLET

Free Area
 208.50 SQ IN
 (1345) SQ CM

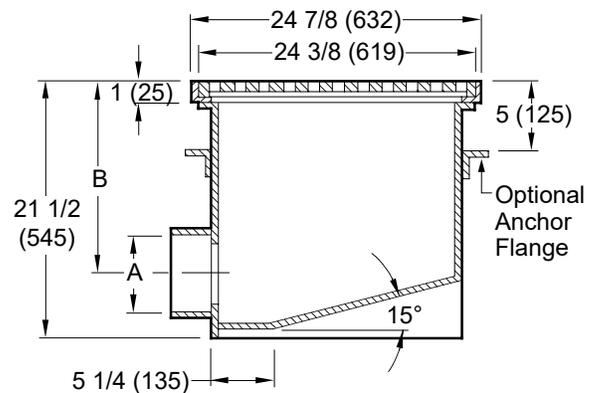
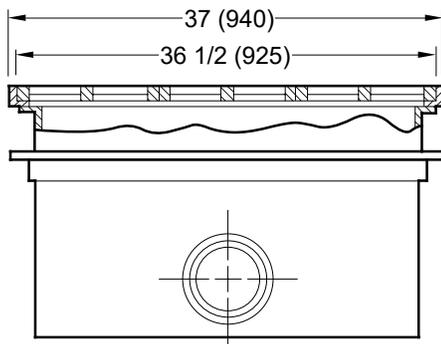


Fig. 6070C ... CAULK OUTLET
 Fig. 6070Y ... NO-HUB OUTLET

A SIZE	"B" CAULK	"B" NO-HUB
06 (150)	17.53 (445)	17.85 (453)
08 (200)	16.38 (416)	16.81 (427)
10 (255)	15.31 (389)	15.72 (399)
12 (305)	14.25 (360)	14.85 (377)

REGULARLY FURNISHED :

Fabricated Stainless Steel Body and Frame with Fabricated Stainless Steel Loose Set Grates.

VARIATIONS:

- Removable Stainless Steel Screen
- Secured Grate -SG
- Secured Grate with Vandal Proof Screws -U
- Anchor Flange -F
- Flange and Flashing Clamp -FC (With Seepage Holes)

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S6070**
 SIZE **A**
 SCALE: **NONE**
 DATE: **7-25-85**
 APPROVED BY: **KG**
 CHECKED BY: **CR**
 DRAWN BY: **CM**
6070
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

P	2-3-25	Revised Variations and Fig. Opts.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 6070
N	7-20-23	Removed Function	HS	CL			
M	4-30-19	Revised Optional Materials	MW	CL			
L	3-10-16	Rev. Table & Variations	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			