


PROMENADE DECK DRAINS

SMALL - 8" (205) SQUARE

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.
 For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

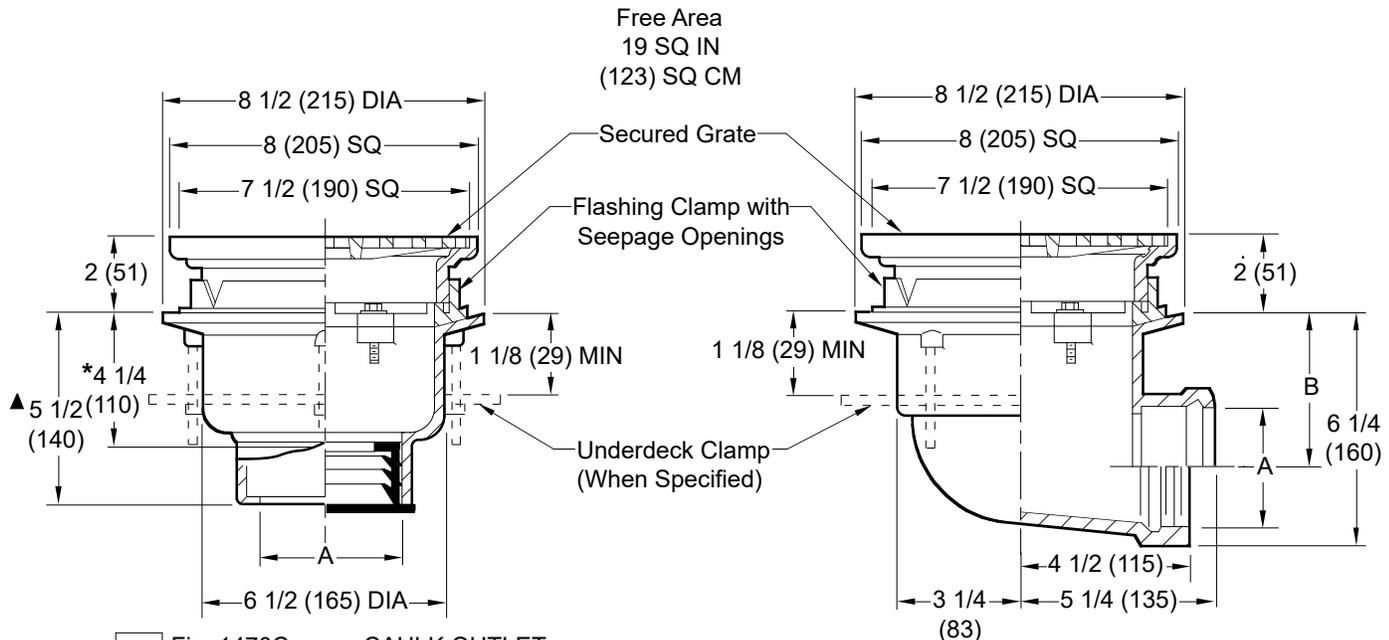

- Fig. 1470C CAULK OUTLET
- Fig. 1470T THREADED OUTLET
- Fig. 1470Y NO-HUB OUTLET

- Fig. 1480C CAULK OUTLET
- Fig. 1480T THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

*This Dimension to Internal Stop of Speedi-Set® Gasket.

▲ Same for Caulk, NO-HUB and Speedi-Set® 4 1/4(110) for Threaded.

REGULARLY FURNISHED:
 Duco Cast Iron Body and Flashing Clamp with Seepage Openings and Secured Square Hole Light Duty ADA Grate.

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: Floor drains or area drains, when used to drain exterior areas (subject to rainfall) should have an open area equal to twice the cross sectional area of the connecting pipe.

recommended deck opening

| | |
|----------------|----------------|
| with suffix -R | 9(230) DIA |
| less suffix -R | 7 3/4(195) DIA |

VARIATIONS:

- Expansion Joint (Specify Fig. 1710) (Fig. 1470 only)
- Extension (Specify Height) -E
- L Speedi-Set® Service Weight (Fig. 1470 only)
- LXH Speedi-Set® Extra Heavy (Fig. 1470 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 1480 only)
- Secondary Flashing Clamp -C2
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Grate -U
- Roof Deck Plate -RDP
- Heel Proof -HP
- Bucket -B (Fig. 1470 Only)

| | | | |
|---------------|-------------|---------|------------|
| A SIZE | 02(50) | 03(75) | 04(100) |
| B | 4 1/2 (115) | 4 (100) | 3 1/2 (89) |

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER: S1470
 SIZE: A
 SCALE: NONE
 DATE: 5-24-93
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER: 1470, 1480

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | |
|------|-----------------------------|--|----------------|----------------|
| REV. | DATE | DESCRIPTION | BY | CKD. BY |
| | 5-9-25 3-27-24 2-1-24 | Revised Variations Revised Variations, Fig. Opts. Removed Function | TB HS HS | CL CL CL |

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

1470, 1480